




Rubber Sheet Roll

TECHNICAL DATA SHEET

FLAME RETARDANT NEOPRENE RUBBER

FIRE RATED / RESISTANT RUBBER

SOLID RUBBER, SYNTHETIC MATERIAL.

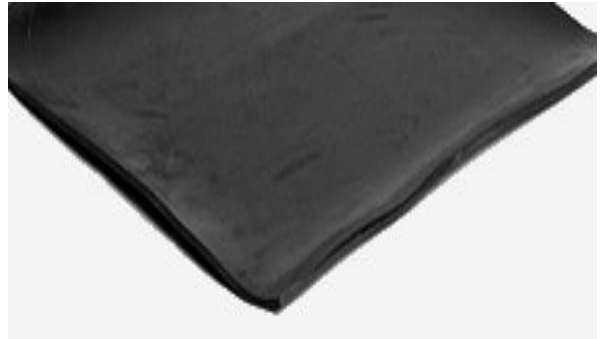

FLAME RETARDANT NEOPRENE RUBBER - Technical Specification Data

FLAME RETARDANT NEOPRENE RUBBER Flame retardant neoprene rubber has excellent electrical, physical, and chemical properties, flame resistant, holds up to environmental stress cracking and ozone. This type of neoprene rubber is also known as Fire-proof rubber. This rubber meets ASTM C-1166 specification for elastomer rubber.

COLOR:	BLACK
SURFACE:	SMOOTH
TEMPERATURE RANGE:	- 50° F TO 250° F
TENSILE:	1200 PSI
DUROMETER:	60A NOMINAL
ELONGATION:	200%

ADHESIVE DATA	
THICKNESS	5 MILS
SURFACE	RELEASE LINER ONE SIDE
TEMPERATURE	250° F
COMPOSITION	ACRYLIC
FDA	NO

Fire Rated: ASTM C-1166 | **Chemical Resistance:** Moderate

UV Rated: Moderate | **Composition:** Synthetic Rubber

RUBBER SHEET ROLL

PO BOX 171
Shippensburg, PA 17257
Phone: 866.834.8606
Fax: 888.440.5797
E-mail: info@rubbersheetroll.com



www.facebook.com/Rubber-Sheet-Roll

www.twitter.com/rubbersheetroll

